


# RADIK VKU




## Technical data

<b>Height H</b>	300, 400, 500, 600, 700, 900 mm
<b>Length L</b>	400, 500, 600, 700, 800, 900, 1000, 1100, 1200, 1400, 1600, 1800, 2000, 2300, 2600, 3000 mm
<b>Depth B</b>	
Type 21 VKU	66 mm
Type 22 VKU	100 mm
Type 33 VKU	155 mm
<b>Connecting pitch</b>	50 mm
<b>Connecting thread</b>	6 x G1/2 inside
<b>Highest allowed working pressure</b>	10 bar
<b>Highest allowed working temperature</b>	110 °C
<b>Radiator connection</b>	right or left bottom

## Examples of connection to the heating system



right bottom  
 $\varphi = 1$



left bottom  
 $\varphi = 1$

## Description


**RADIK VKU** model is a steel panel radiator in VENTIL KOMPAKT version which allows **left or right bottom connection** to the pressurized heating system. No hangers are welded on the back, so radiator types 21, 22, and 33 can be turned round.

Note:


Type 33 VKU does not have symmetrically placed connections with respect to the depth of the radiator.

When placing the radiator on the wall, it is necessary to use Compact Bracket Plus (see the KORAMONT catalogue).


## Overview of types

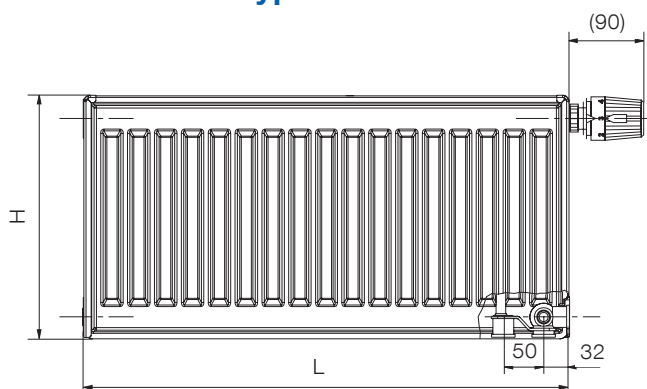

**Type 21 VKU**



**Type 22 VKU**



**Type 33 VKU**

